
## Spring Loaded Level Compesator - Smooth Body - Non Rotative

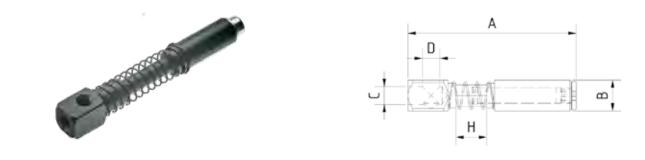

Part No.	Α	В	C	D	H
VCASL10-76-H20-M5-M5	76	10	M5	M5	20
VCASL14-80-H15-G1/8-G1/8	80	14	G1/8	G1/8	15
VCASL14-105-H35-G1/8-G1/8	105	14	G1/8	G1/8	35
VCASL20-115-H20-G1/4-G1/4	115	20	G1/4	G1/4	20
VCASL20-139-H40-G1/4-G1/4	139	20	G1/4	G1/4	40

Non-Rotational.


· Compensates the differential movement during the removal from the mould.

Fixed Head.

• The component is hard anodized and has excellent gliding properties.

## Spring Loaded Level Compensator - Threaded Body





Α	В	G1	G2	Н
M10X1	59	M5	M5	10
M10X1	85	M5	M5	30
M14X1,5	86	G1/8	G1/8	15
M14X1,5	111	G1/8	G1/8	40
M20X1,5	109	G1/8	G1/8	20
M20X1,5	147	G1/8	G1/8	50
	M10X1 M14X1,5 M14X1,5 M20X1,5	M10X1 85   M14X1,5 86   M14X1,5 111   M20X1,5 109	M10X1 59 M5   M10X1 85 M5   M14X1,5 86 G1/8   M14X1,5 111 G1/8   M20X1,5 109 G1/8	M10X1 59 M5 M5   M10X1 85 M5 M5   M10X1 86 G1/8 G1/8   M14X1,5 86 G1/8 G1/8   M14X1,5 111 G1/8 G1/8   M20X1,5 109 G1/8 G1/8

• Non-Rotational.

• Compensates the differential movement during the removal from the mould.

Fixed Head.

• The component is hard anodized and has excellent gliding properties.