


DOWEL PINS

Dowel Pins - Threaded - DIN 7979

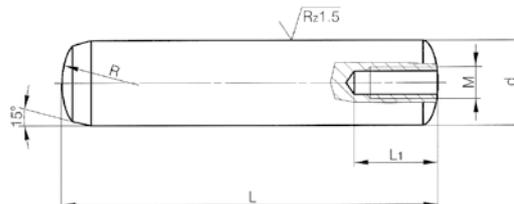

L	L1	d	Ø 6 M4	Ø 8 M5	Ø 10 M6	Ø 12 M6	Ø 14 M8	Ø 16 M8	Ø 20 M10
16	10	6	•	•					
18	12	6	•	•					
20	12	6	•	•	•	•			
24	16	6	•	•	•	•			
28	16	6	•	•	•	•	•		
32	20	6	•	•	•	•	•	•	
36	20	6	•	•	•	•	•	•	
40	25	6	•	•	•	•	•	•	•
45	25	6	•	•	•	•	•	•	•
50	25	6	•	•	•	•	•	•	•
55	25	6	•	•	•	•	•	•	•
60	25	6	•	•	•	•	•	•	•
70	25	6	•	•	•	•	•	•	•
80	25	6	•	•	•	•	•	•	•
90	25	6	•	•	•	•	•	•	•
100	25	6	•	•	•	•	•	•	•
110	25	6	•	•	•	•	•	•	•
120	25	6	•	•	•	•	•	•	•

Surface: Hardened and Polished.
 Material: 1.3505.
 Tolerance: m6.
 Hardness: 60 ± 2 HRC.

Order example

CYLG+d+L ex. CYLG832 (8x32mm).