


**EJECTOR PINS**

**Ejector Pins, DIN 6751, Type AB - Nitrided**

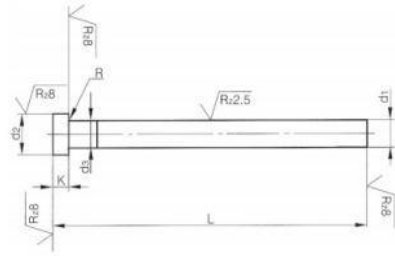

d1 g6	d2 -0,2	k -0,05	R	d3	L 0/+2											
					100	125	160	200	250	315	400	500	630	800	1000	
1,5	3	1,5	0,2	d <sub>1</sub> + 0,03	*	*	*	*	*	*	*	*	*	*	*	
2,0	4	2			*	*	*	*	*	*	*	*	*	*	*	
2,2			0,3		*	*	*	*	*	*	*	*	*	*	*	
2,5	5	3			*	*	*	*	*	*	*	*	*	*	*	
3,0	6				*	*	*	*	*	*	*	*	*	*	*	
3,2					*	*	*	*	*	*	*	*	*	*	*	
3,5	7				*	*	*	*	*	*	*	*	*	*	*	
3,7					*	*	*	*	*	*	*	*	*	*	*	
4,0	8				*	*	*	*	*	*	*	*	*	*	*	
4,2					*	*	*	*	*	*	*	*	*	*	*	
4,5					*	*	*	*	*	*	*	*	*	*	*	
5,0	10				*	*	*	*	*	*	*	*	*	*	*	
5,2					*	*	*	*	*	*	*	*	*	*	*	
6,0	12	5	0,5		*	*	*	*	*	*	*	*	*	*	*	
6,2					*	*	*	*	*	*	*	*	*	*	*	
8,0	14				*	*	*	*	*	*	*	*	*	*	*	
8,2				d <sub>1</sub> + 0,04	*	*	*	*	*	*	*	*	*	*	*	
10,0	16				*	*	*	*	*	*	*	*	*	*	*	
10,2					*	*	*	*	*	*	*	*	*	*	*	
11,0					*	*	*	*	*	*	*	*	*	*	*	
12,0	20	7	0,8		*	*	*	*	*	*	*	*	*	*	*	
12,2					*	*	*	*	*	*	*	*	*	*	*	
12,5					*	*	*	*	*	*	*	*	*	*	*	
14,0	22				*	*	*	*	*	*	*	*	*	*	*	
16,0					*	*	*	*	*	*	*	*	*	*	*	
20,0	26	8	1	d <sub>1</sub> + 0,1	*	*	*	*	*	*	*	*	*	*	*	
25,0	32	10			*	*	*	*	*	*	*	*	*	*	*	
32,0	40				*	*	*	*	*	*	*	*	*	*	*	

Surface: Nitrided and Polished.  
 Material: 1.2344.  
 Hardness: 65 ± 2 HRC. Head 45 ± 5 HRC.

**Order example**

UDSAB+d1+L ex. UDSAB4160 (4x160 mm).