


**EJECTOR PINS**

**Ejector Pins, DIN 1530, Type D - Hardened**

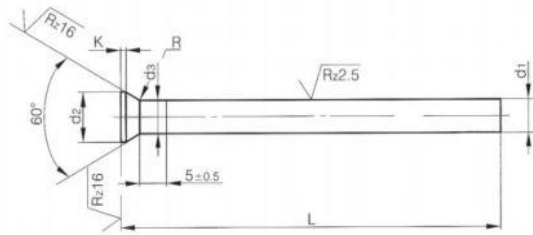

d1 g6	d2-0,2	k -0,05	R 0/+0,2	d3	L 0/+2				
					100	125	160	200	250
1	1,8	0,3	0,3	d <sub>1</sub> + 0,03	*	*	*	*	*
1,2	2				*	*	*	*	*
1,5	2,2				*	*	*	*	*
2	3				*	*	*	*	*
2,2	3,2				*	*	*	*	*
2,5	3,5				*	*	*	*	*
3	4,5				*	*	*	*	*
3,5	5				*	*	*	*	*
4	5,5				*	*	*	*	*
4,5	6				*	*	*	*	*
5	6,5				*	*	*	*	*
5,5	7		0,5		*	*	*	*	*
6	8	0,5			*	*	*	*	*
6,5	9				*	*	*	*	*
7					*	*	*	*	*
7,5	10				*	*	*	*	*
8					*	*	*	*	*
10	12				*	*	*	*	*
12	14				*	*	*	*	*
14	16	0,8	0,8	d <sub>1</sub> + 0,04	*	*	*	*	*
16	18				*	*	*	*	*

Surface: Hardened and Polished.  
 Material: 1.2516.  
 Hardness: 60 ± 2 HRC. Head 45 ± 5 HRC.

**Order example**  
 UDSD+d1+L ex. UDSD4160 (4x160 mm).