


Flat Ejectors - Hardened

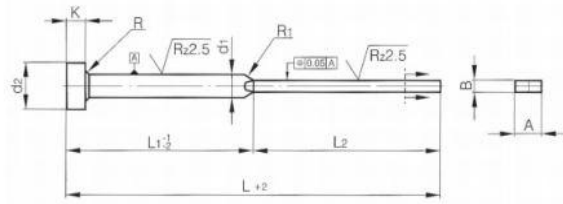

d1 g6	A +0 -0,015	B +0 -0,015	d2 +0 -0,2	K -0,05	L	100	125	160	200
					L1	50	65	80	100
					L2	50	60	80	100
4	3,5	1	8	3		*	*		
4,2	3,8	1	8	3		*	*	*	*
4,2	3,8	1,2	8	3		*	*	*	*
6	5,5	1,2	12	5		*	*	*	*
6	5,5	1,5	12	5		*	*	*	*
6	5,5	2	12	5		*	*	*	*
8	7,5	1,2	14	5		*	*	*	*
8	7,5	1,5	14	5		*	*	*	*
8	7,5	2	14	5		*	*	*	*

Surface: Hardened and Polished/Grinded.
 Material: 1.2516.
 Hardness: Skalf 60 ± 2 HRC. Head 45 ± 5 HRC.

Order example

FLU(+B+A+L)H ex. FLU25,5125H (2x5,5x125mm).