


**CORE PINS**

**Core Pins ISO 6751 Non Hardened (Soft)**

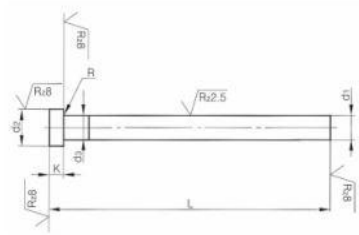

d1 g6	d2-0,2	k-0,05	R	d3	100	125	160	200	250	315
2	4	2	0,2	d <sub>1</sub> + 0,03	*	*	*	*		
2,2			0,3		*	*	*			
2,5	5	3			*	*	*			
3	6				*	*	*	*		
3,2					*	*	*	*		
3,5	7				*	*	*	*		
4	8				*	*	*	*		
4,2					*	*	*	*		
4,5					*	*	*	*		
5	10				*	*	*	*	*	
5,2					*	*	*	*		
5,5					*	*	*	*		
6	12	5	0,5		*	*	*	*	*	
6,2					*	*	*	*	*	
6,5					*	*	*	*	*	
7					*	*	*	*	*	
8	14				*	*	*	*	*	*
10				d <sub>1</sub> + 0,04	*	*	*	*	*	*
12	20	7			*	*	*	*	*	*
16					*	*	*	*	*	*

Surface: Nitrided and Polished.  
 Material: 1.2344.  
 Hardness: 40 ± 2 HRC. Head 45 ± 5 HRC.

**Order example**  
 UDSAC + d1 + L ex. UDSAC4160 (4X160 mm).