


**Dowel Pins, DIN 6325**

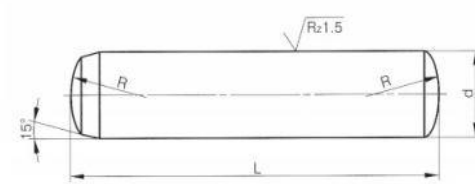

L \ d	2	3	4	5	6	8	10	12	14	16	20
6	*	*									
8	*	*	*	*							
10	*	*	*	*	*						
12	*	*	*	*	*	*					
14	*	*	*	*	*	*					
16	*	*	*	*	*	*	*				
18	*	*	*	*	*	*	*				
20	*	*	*	*	*	*	*	*			
24	*	*	*	*	*	*	*	*	*		
28	*	*	*	*	*	*	*	*	*	*	
32	*	*	*	*	*	*	*	*	*	*	*
36		*	*	*	*	*	*	*	*	*	*
40			*	*	*	*	*	*	*	*	*
45			*	*	*	*	*	*	*	*	*
50			*	*	*	*	*	*	*	*	*
55			*	*	*	*	*	*	*	*	*
60			*	*	*	*	*	*	*	*	*
70				*	*	*	*	*	*	*	*
80				*	*	*	*	*	*	*	*
90					*	*	*	*	*	*	*
100					*	*	*	*	*	*	*
120						*	*	*	*	*	*
130								*	*	*	*
140									*	*	*
150										*	*

Surface: Hardened and Polished.  
 Material: 1.3505.  
 Tolerance: m6.  
 Hardness: 60 ± 2 HRC.

**Order example**  
 CYL+d+L ex. CYL532 (5x32mm).